

DEMOLITION: REMOVE EXISTING WOOD BOARDWALK ENTRY, ASSOCIATED STRUCTURES, AND ASPHALT PAVING SECTION AS INDICATED ON THE PLANS. ALL MATERIALS RESULTING FROM DEMOLITION SHALL BE DISPOSED OFF OF STATE PROPERTY IN A RESPONSIBLE MANNER. CLEAN EARTH GENERATED DURING DEMOLITION OR CONSTRUCTION MAY BE USED ON SITE IF APPROVED BY THE STATES REPRESENTATIVE.

GRADING: THIS PROJECT WILL REQUIRE THE ADDITION OF SOIL MATERIALS TO BUILD SURFACES TO MEET DESIRED FINISHED GRADES. IMPORTED FILL MATERIAL SHALL BE PREDOMINANTLY GRANULAR, NON-EXPANSIVE FULL MATRIX SOILS, FREE OF ROOTS OR OTHER ORGANIC MATTER. SOIL SHALL BE FREE OF ROCKS GREATER THAN 2" IN DIAMETER. IMPORTED FILL IS SUBJECT TO THE APPROVAL OF THE STATES REPRESENTATIVE. REMOVE VEGETATION, DEBRIS, UNSATISFACTORY SOIL MATERIALS FROM THE GROUND SURFACE PRIOR TO PLACEMENT OF FILLS. SCARIPY EXISTING SURFACE SO FILL MATERIAL WILL BOND WITH THE EXISTING SURFACE. SOILS SHALL BE UNIFORMLY GRADED TO MEET DESIRED GRADES AND BLEND WITH EXISTING SURFACE GRADES. FILL SOILS AND AGGREGATE BASE ROCK MATERIALS SHALL BE COMPACTED TO 90% OF MAXIMUM DENSITY.

CONCRETE: CONCRETE SHALL BE 5 SACK MIX WITH 1-INCH MAX. AGGREGATE SIZE, COLORED LT. BROWN. RE-BAR TO BE EPOXY COATED AND TIED WITH STAINLESS STEEL WIRE, WITH SIZE AND CONFIGURATION AS SHOWN ON THE PLAN. RE-BAR SHALL NOT COME IN CONTACT WITH THE GROUND. CONCRETE TO BE PLACED FULL THICKNESS (4" MIN.) TO THE FINISHED ELEVATIONS SHOWN ON THE PLANS. SLOPE OR PITCH AS INDICATED TO INSURE PROPER DRAINAGE. FINISHED SURFACE TO BE TROWLED TO SMOOTH BUT NON-SUP FINISH. SEED SURFACE WITH ROCK SALT FOR ADDITIONAL TEXTURED FINISH. CONTRACTOR TO PROVIDE EXAMPLES OF FINISHED TEXTURE AND COLOR TO STATES REPRESENTATIVE FOR APPROVAL PRIOR TO SCHEDULING CONCRETE PLACEMENT.



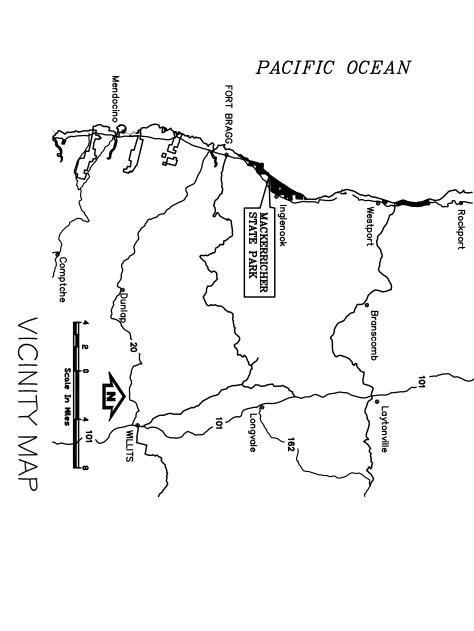

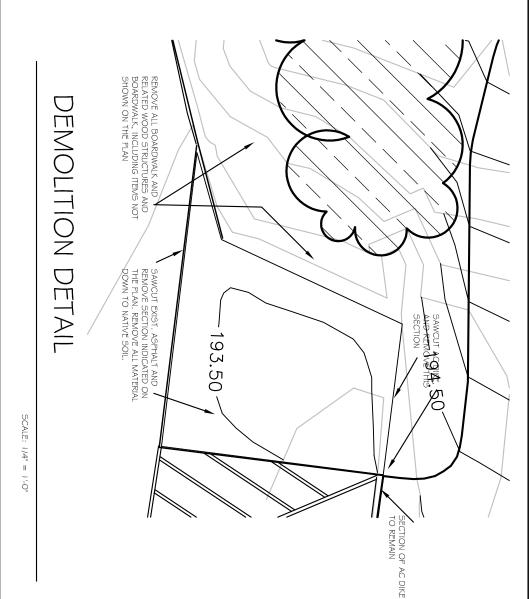

653-014 DRAWING NO.

SCALE: I" = 20'

MacKerricher State Park LAGUNA PT. BOARDWALK ENTRANCE MODIFICATIONS

RESOURCES AGENCY OF CALIFORNIA DEPARTMENT OF PARKS AND RECREATION REVISIONS DATE

drawn Nov.2003

